


HDU - Specifications

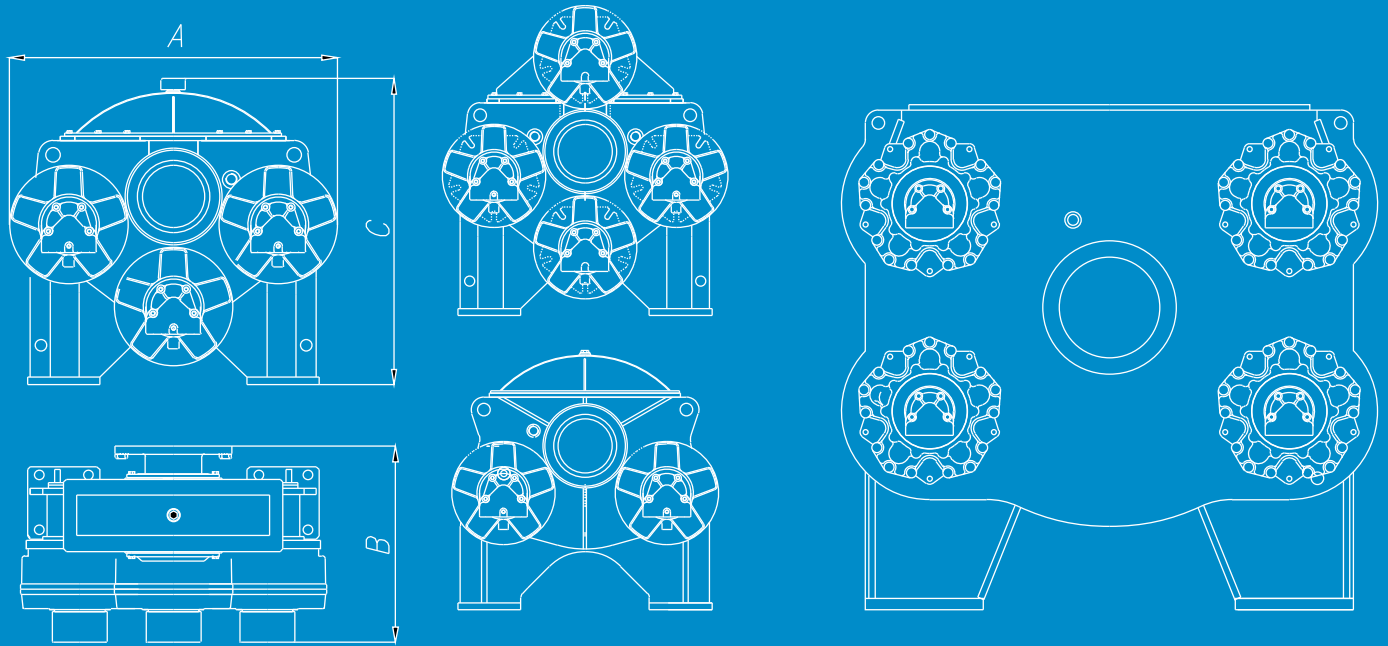

RAPP HYDEMA DRIVES: DIMENSIONS & SPECIFICATIONS

Drive unit type	A (in)	B (in)	C (in)	Motors (#)	Weight (lb)
HDU-2300	35	23	35	3	1234
HDU-2500	42	27	31	2	1675
HDU-4000	42	27	38	3	2095
HDU-4500	42	27	46	4	2425
HDU-7500	52	32	43	3	2800
HDU-10000	52	32	52	4	3355
HDU-20000	75	35	62	3	5895
HDU-26000	75	35	77	4	7195
HDU-34000	84	50	85	4	10935

Drive unit type	Displacement * cub.inch/rev.	Specific Theoretical torque lbf-ft./psi	Rated speed rev./min.	Max. speed rev./min.	Max pressure psi
HDU-2300	513	6,85	60	90	3600
HDU-2500	610	7,92	60	90	3600
HDU-4000	915	11,88	60	90	3600
HDU-4500	1220	15,85	60	90	3600
HDU-7500	1664	21,64	40	60	3600
HDU-10000	2219	28,85	40	60	3600
HDU-20000	3541	46,09	25	38	3600
HDU-26000	4722	61,46	25	38	3600
HDU-34000	7689	98,85	25	38	3600

* All units also available in other displacements, check for options.

Rapp Hydema AS, Norway
 Rapp Hydema Subsea LLC, U.S.
 Rapp Hydema U.S.Inc.
 Rapp Ecosse UK Ltd., UK
 Rapp Iberia, S.L. - Spain

Tel + 47 75 55 01 00
 Tel + 1 281 679 9888
 Tel + 1 206 286 8162
 Tel + 44 (0) 1779 490044
 Tel +34 986 246 122



RAPP HYDEMA